



www.huot.fr

1180 > HUOT's new reference ready-to-install

- Totally resistant to all standardized compaction operations
- Complete set with valves and fittings
- Assembly resisting to corrosive environments
- Its shape and dimensions ensure a complete accessibility for maintenance operations
- Available in 3 heights



isolated

- Angular adjustment in two directions
- Collar : height adjustment up to 250 mm


- 1 • Telescopic meter support
- 2 • Clips for fixing and unfixing the meter setting
- 3 • **No tools needed for changing the setting**



Standard ND15 ou ND20 valves

meter inlet
turn ball valve with handle, Secuo-stop lock available

meter outlet
non-return valve with drain cap situated before and behind the valve



1 or 2 water meters

ND 15 : L = 110 to 170 mm
ND 20 : L = 130 to 190 mm

CITERNUO 1180
ND15 = 105 to 170 mm
ND 20 = 130 to 190 mm

CITERNUO 1156
ND15 = 110 to 170 mm
ND 20 = 130 to 190 mm



> Horizontal water meter

Specially designed shape to ease maintenance operations

- > Insulated box, 12,5 tonne load cover
- > REXUO inlet and outlet connections
- > integrated non-return valve as per French standards in the outlet setting

product range water meter boxes regarduo - bornuo - citernuo

Nowadays, water network managers meet with constraints which require a permanent access to the supply terminals. Therefore, service connection designers plan their installation on the border of private properties : under gardens under pavements in perimeter walls. That's why HUOT endeavoured to develop a complete range of water meter boxes in order to meet all their needs.

WALL MOUNTED • NOT UNDERGROUND

RAIL 9536
ND15 : L = 105 to 175 mm



- > Ready-to-install, fully equipped meter support
- > Setting components can be interchanged without special tools
- > Direct connection thanks to the REXUO system
- > Straight SECUCO valve with sliding bush at the meter inlet
- > Non-return valve with shoulder at the outlet

> Horizontal meter

REGARDUO 1170
ND15 = 105 to 170 mm

REGARDUO 1171
ND15 = 105 to 170 mm



- Very stable during installation**
- > Suited for all types of connections fittings (REXUO recommended)
 - > Snap-on meter setting
 - > Integrated non-return valve in the meter outlet setting

Setting components can be interchanged without special tools during pre-assembly on bench



Optional

- > Automatic water cut-off

COFACUO - insulated door
ND15 : L = 105 to 170 mm
ND20 : L = 190 mm



- > Ready-to-install, fully equipped
- > Direct connection thanks to the REXUO system
- > Adjustable meter support
- > Setting components can be interchanged without special tools
- > SECUCO valve at meter inlet

> Concentric meter

REGARDUO 169 ND : 15/20 mm
BORNUO 186 ND : 15/20 mm

REGARDUO 156
ND : 15/20 mm



156 h = 540 - 600 156 h = 740 - 860 156 h = 940 - 1060 169 h = 840 - 960 186 h = 840 - 960 186 h = 740 - 890

Compact boxes



Easier maintenance thanks to interchangeable components :

- valve head (French SPDE standard)
- integrated check valve meeting French national standards

Optional

- > Automatic water cut-off activated by removal of the valve head

Compactness for installation on congested networks

- > REXUO connections
- > Brass meter setting

Inviolable valve



- > Meter inlet tamper proof SECUCO valve
- > Manual water cut-off by SECUCO key


Cast iron A15 or 12,5 tonne load head depending on the model

- > Connection device compatible with all types of connection fittings (REXUO recommended)
- > Check valve as per French standards integrated in the meter outlet setting

All technical leaflets can be down loaded from our web-site www.huot.fr

The data recorded


by the national meteorological services allow to define the criteria for thermic protection and the needed depth for the connection pipes which, in the principle, is the same as the depth of the water main

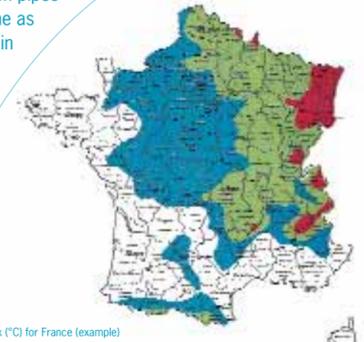

frost index (°C) for France (example)

Technological innovation in the service of water control.

+ The drinking water distribution networks are part of the community assets. The performances and life span of its connections and equipments must meet those of the pipes they are fitted on. For this reason , products chosen with care and installed rigorously will ensure the good working order and the lasting quality of those assets. +

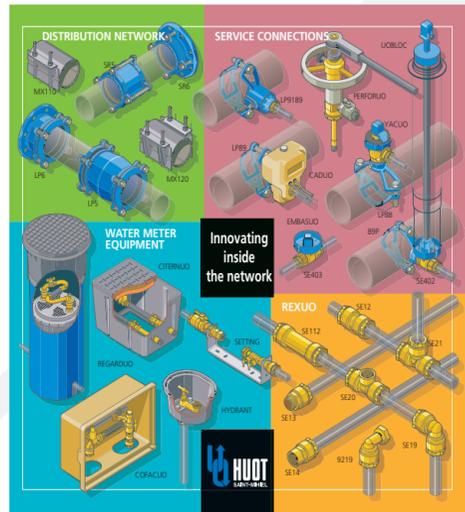

Designed and manufactured in France



More than 40 countries trust HUOT quality

In France and overseas territories
10 sales engineers
3 demonstrators



Sales department
5, place de la Bataille de Stalingrad
75010 Paris
Tel.: + 33 (0) 153 38 83 98
Fax : + 33 (0) 153 38 83 99

Distributor



Water meter **equipment**
Innovation in the core of the meter box